



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

*Search Report*

(11) Publication number:

**0 293 756  
A2**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number: **88108394.3**

(51) Int. Cl. 4: **B29C 45/58 , B29C 45/27**

(22) Date of filing: **26.05.88**

(30) Priority: **01.06.87 US 56056**

(43) Date of publication of application:  
**07.12.88 Bulletin 88/49**

(84) Designated Contracting States:  
**AT BE CH DE ES FR GB IT LI NL SE**


(71) Applicant: **HUSKY INJECTION MOLDING  
SYSTEMS LTD.**  
500 Queen Street South  
CA-Bolton, Ontario L0P 1A0(CA)

(72) Inventor: **Halar, Mladen**  
21 Deerpark Cres.  
Brampton Ontario L6X 2T6(CA)  
Inventor: **Paulovic, Anthony**  
369 Hersey Cr.  
Brampton Ontario(CA)  
Inventor: **Heathe, William E.**  
428 Bud Gergory Blvd.  
Mississauga, Ontario L4Z 2P3(CA)

(74) Representative: **Weiss, Peter**  
Schlachthausstrasse 1 Postfach 466  
D-7700 Singen a.H.(DE)

(54) Method of processing molten plastic materials.

(57) Molten plastic material is transferred from a source of molten plastic material to a nozzle for supplying a mold for the formation of molded plastic articles along a transfer path, which subjects the molten plastic material to shear heating along the transfer path with the creation of a shear heating history. The shear heating history of the molten plastic material is substantially equalized by mixing the material at least once in the transfer path. The heating history of the molten plastic material is also equalized by mixing the material while it is in the source.

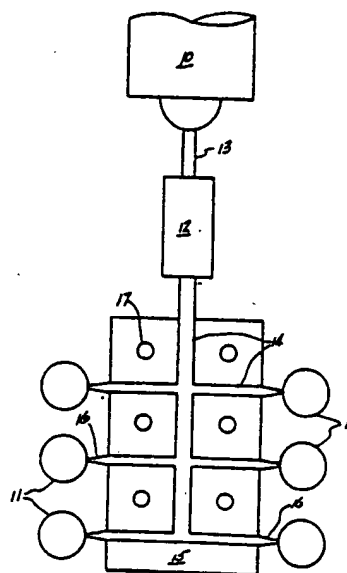

**FIG-1**

**EP 0 293 756 A2**

distant from the channels so that the resin is not subject to large variations of heat input.

The "memory" of shear heating is called the "shear history" of the resin and it manifests itself as a variable viscosity profile and sometimes as degradation of the resin due to local overheating. A variable viscosity profile across the tubular section in turn causes the lower viscosity resin to flow more easily and hence preferentially to fill one cavity rather than another. This will be apparent by analyzing the change in shear rate profiles shown in Fig. 5 as the molten plastic material is subdivided in the manifold.

Thus, Fig. 5 shows transfer path or channel 30 subdivided a first time into transfer paths 31 and 32 and subdivided a second time into transfer paths 33 and 34. Shear rate profile 35 changes to shear rate profiles 36 and 37 as the resin is subdivided into transfer paths 31 and 32, respectively. Thus, as the resin is subdivided into transfer paths 31 and 32, the resin at channel walls 38 of first transfer path 30 follows the path of the new channels clinging to walls 39 and 40 of new channels 31 and 32 respectively immediately adjacent walls 38. On the other hand, the resin in the center of channel 30 is split and follows the new channel walls 41 and 42 on the sides opposite walls 39 and 40. The shear rate profiles 36 and 37 in second channels 31 and 32 can be clearly seen as being quite different from shear rate profile 35 of channel 30.

As the resin flows along second channels 31 and 32, the shear rate profile is again modified to shear rate profile 43. For convenience, the profiles are only shown in one direction. Subdividing the flow a second time into third channels 33 and 34 causes a still further change in the shear rate profiles 44 and 45.

Clearly the greater the distance between the subdivisions, the greater is the effect of the flow through the channels. Short distances between the subdivisions break up the flow frequently and tend to minimize the channel flow effect. Clearly, the significant change in shear rate profile represents an unacceptable situation as discussed hereinabove.

As can be clearly seen, in accordance with the present invention, the molten plastic material is mixed at least once in the transfer path in order to equalize the shear heating history of the molten plastic material. This is clearly seen in Fig. 6 wherein resin mixer 50 is placed in channel 32, with an exemplificative embodiment thereof shown in Fig. 7. It has been found in accordance with the present invention that by mixing the molten plastic material at least once, such as in the transfer path, to equalize the shear heating history thereof the foregoing disadvantageous results can be readily overcome. Consequently, the heating history of the

resin can be controlled and the flow balanced to insure the resin being delivered to each cavity is in an essentially identical condition. This in turn eliminates the problems of unbalanced filling and degradation of heat sensitive resins.

As clearly shown in Fig. 6, mixer 50 is placed in second channel 32. The resin entering mixer 50 displays the typical shear heating profile 37 as shown in Fig. 5 resulting from the first subdivision. However, the resin leaving mixer 50 displays an equalized shear heating profile 51 which is slightly modified through the second subdivision into transfer paths 33 and 34 to become shear history profiles 52 and 53. Naturally, a similar mixer 50 should be placed in channel 31 in order to obtain the same effect, and also elsewhere in the transfer path where necessary.

As indicated hereinabove a typical mixer 50 is shown in Fig. 7 which includes a plurality of vanes 54 across the transfer path in order to obtain effective mixing of the resin. The vanes shown in Fig. 7 have a semi-circular configuration to disrupt resin flow and intermix the resin by a swirling interchange of resin material. The embodiment of Fig. 7 is representative only and any suitable mixing device may be used. Naturally, the particular mixers used must be correctly sized in both diameter length and degree of mixing to minimize the associated pressure drop, excessive shear heating and impedance to flow. Preferred results are obtained based on mixer placement in the transfer path. Thus, for example, if the shear heating profile indicates that the temperature of the resin will increase more than approximately 10°F depending of course on the resin then a mixer should be installed at that location to redistribute the resin in the channel. For example, shear heating profile 43 in Fig. 5 clearly indicates the need for a mixer. Secondly, if by comparing the velocity profiles of the resin in symmetrically opposite parts of the channel system one finds that said velocity profiles differ, then a mixer should be installed at these locations to restore a balanced flow which is substantially the same in symmetrically opposite locations of the channel system. Thus, for example the different profiles 44 and 45 in Fig. 5 clearly indicates the need for a mixer.

As indicated hereinabove the present invention contemplates mixing the molten plastic material at least once, preferably in the transfer path, to equalize the shear heating history thereof. The transfer path contemplated may be the transfer path from a source of molten plastic material, as extruder 10 in Fig. 1, to a reservoir or shooting pot as shooting pot 12 in Fig. 1. Alternatively, the transfer path can be the transfer path to the molds, as transfer path 14 in Fig. 1.

The benefits to be obtained by the present

invention are clearly shown by Figures 8 and 9. Both of these figures illustrate the acetaldehyde generation for each cavity of a 32 cavity mold in a system used to process a plastic resin into a desired product. Figure 8 reports the results of using a hot runner manifold with a mixer in the transfer path. Figure 9 reports the results of using a hot runner manifold without a mixer. Comparison of these figures clearly demonstrates that the use of a mixer will promote more uniform results as well as significantly reduce the mean acetaldehyde generated per cavity.

Molten plastic material is often subjected to shear heating while it is in the source. The present invention further contemplates mixing the molten plastic material while it is within the source so as to improve the material flow characteristics by providing a molten plastic material having a substantially zero gradient melt temperature. As shown in Figure 10, the source 10 could be a screw type plasticizer. To achieve the foregoing, one or more mixers 50 are positioned within the source 10. For example, mixing device 58 having internal mixers 50 may be mounted to the head 60 of an extruder screw 61. Any suitable means known in the art such as a threaded connection may be used to join the device 58 to the screw 61. The mixer(s) 50 may be of the type shown in Figure 7. Molten plastic to be supplied to the transfer path 13 and eventually to the nozzles 16 and the molds 11 is first passed through channel(s) 62 into the mixer(s) 50 and subsequently into the path 13 via the channel 64. In this way, material having a substantially equalized heating history can be provided to the transfer path.

It is to be understood that the invention is not limited to the illustrations described and shown herein, which are deemed to be merely illustrative of the best modes of carrying out the invention, and which are susceptible of modification of form, size, arrangement of parts and details of operation. The invention rather is intended to encompass all such modifications which are within its spirit and scope as defined by the claims.

## Claims

**Claim 1.** Method of processing molten plastic material for the formation of molded plastic articles which comprises: providing a source (10) of molten plastic material; transferring said molten plastic material from said source (10) to a mold (11) for the formation of said molded plastic articles along a transfer path (13,31-34) including at least one tubular channel (20,30), thereby subjecting said molten plastic material to shear heating with the creation of

a shear heating history; and mixing said molten plastic material at least once to equalize the shear heating history thereof.

**Claim 2.** A method according to claim 1 wherein said transfer path (13) includes at least one change in direction, and wherein said mixing step takes place after the change in direction.

**Claim 3.** A method according to claim 1 or 2 wherein said transfer path (13) takes a place in a hot runner manifold (15).

**Claim 4.** A method according to one of claims 1-3 wherein said molten plastic material is transferred to a multicavity mold (11).

**Claim 5.** A method according to at least one of claims 1-4 wherein said mixing step takes place when the temperature of said molten plastic material increases by about at least 10° F.

**Claim 6.** A method according to at least one of claims 1-5 wherein said transfer path (13) is characterized by a split transfer path with symmetrically opposite changes of direction, and wherein said mixing step takes place when the velocity profiles (21) of the molten plastic material in the transfer path differ in symmetrically opposite parts of the transfer path, wherein said molten plastic material is mixed before said split transfer path.

**Claim 7.** A method according to at least one of claims 1-6 wherein said molten plastic material is transferred from a source (10) of molten plastic material to a reservoir (12) and thence to a mold (11), wherein said mixing step takes place in the transfer path (13) from said source (10) to said reservoir (12).

**Claim 8.** A method according to at least one of claims 1-7 wherein said mixing step takes place in said source (10) so as to provide material having a substantially zero gradient melt temperature.

**Claim 9.** A method according to at least one of claims 1-8 wherein an injection nozzle (16) is provided for supplying said mold (11) with said molten plastic material and said mixing step takes place prior to said material being delivered to said nozzle (16).

**Claim 10.** A system for processing molten plastic material susceptible to shear heating and the creation of a shear heating history for the formation of molded plastic articles which comprises:

a source (10) of molten plastic material;  
a mold (11) for the formation of said molded plastic articles;  
a nozzle (16) for supplying the mold (11) with said molten plastic material;  
means for transferring said molten plastic material from said source (10) to said nozzle (16); and

means for substantially equalizing the shear heating history of said plastic material at least once prior to it being delivered to said nozzle (16).

Claim 11. A system according to claim 10 further comprising said equalizing means (50) being located within said source (10) to permit the delivery of plastic material having a substantially zero gradient melt temperature.

5

Claim 12. A system according to claim 11 wherein said source (10) comprises a screw-type extruder (61) and said equalizing means comprises a mixing device (58) having at least one mixer (50) mounted to said extruder.

10

Claim 13. A system according to claim 10-12 wherein said equalizing means comprises means for substantially equalizing the shear history of said plastic material more than once prior to said plastic material being delivered to said nozzle (16).

15

Claim 14. A system according to at least one of claims 10-13 further comprising said equalizing means being located within said transfer means (13).

Claim 15. A system according to at least one of claims 10-14 wherein said transfer means (13) includes a plurality of tubular channels (10,30,38-42) and said equalizing means comprises at least one mixer (50) positioned within at least one of said channels.

20

25

Claim 16. A system according to at least one of claims 10-15 further comprising a reservoir (12) and said equalizing means being positioned intermediate said source (10) and said reservoir (12).

Claim 17. A system according to at least one of claims 10-16 wherein said transfer means comprises a path (13) having at least one change in direction and wherein said equalizing means is located after said at least one change in direction.

30

Claim 18. A system according to at least one of claims 10-17 wherein said mold (11) is multicavity mold having a plurality of nozzles (16) associated therewith.


35

40



45


50

55

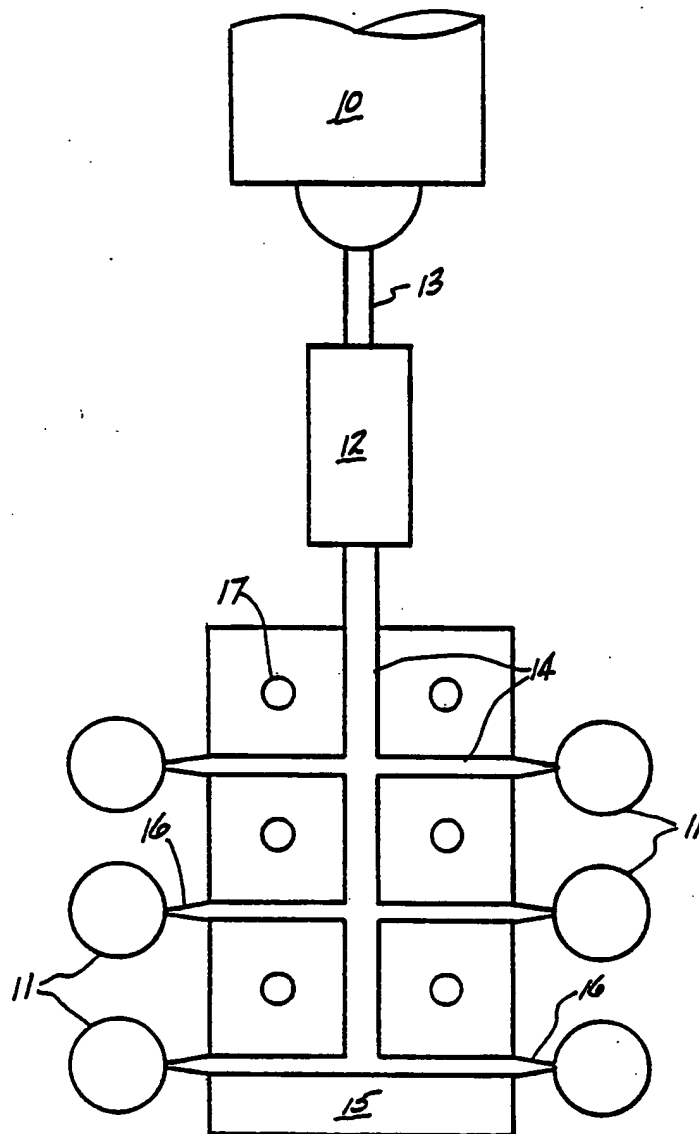

***FIG-1***

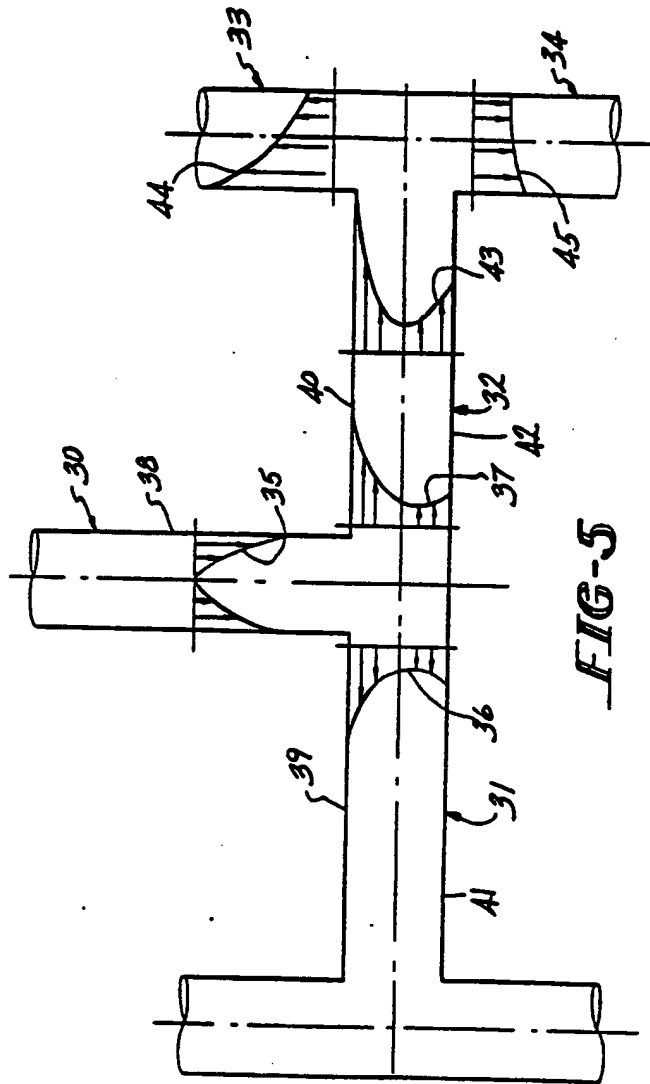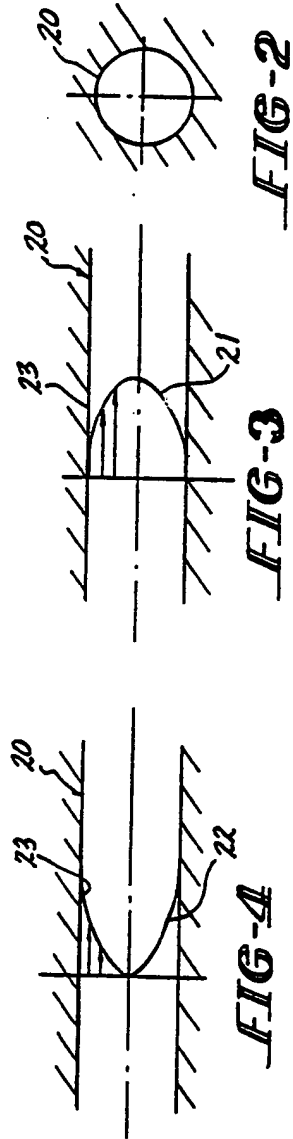


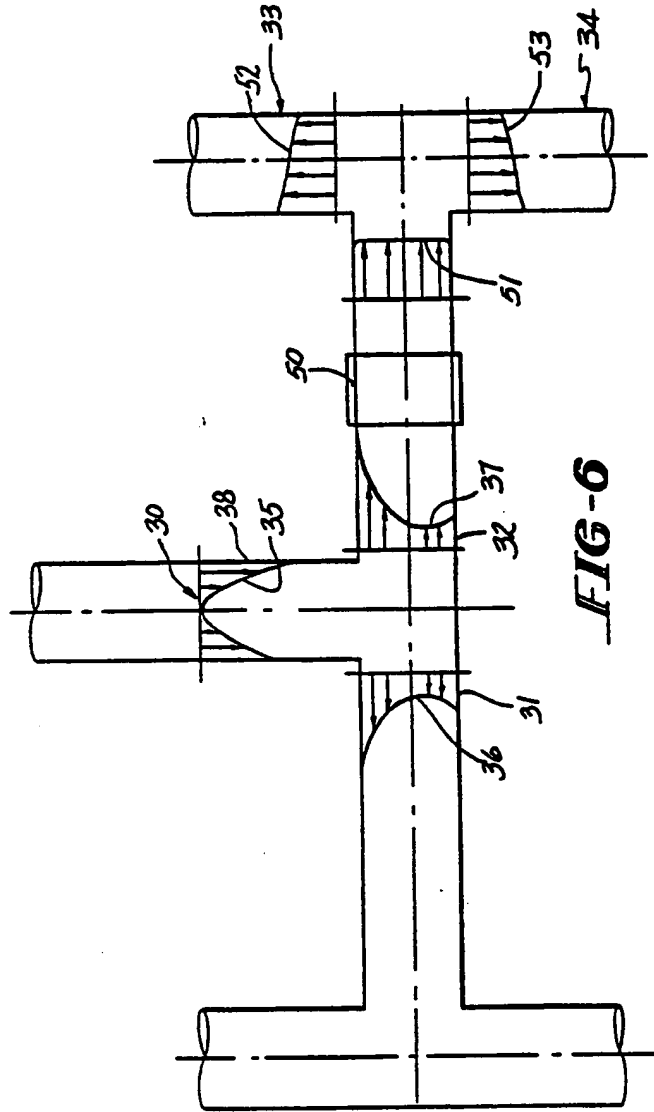


**FIG-6**



**FIG-7**

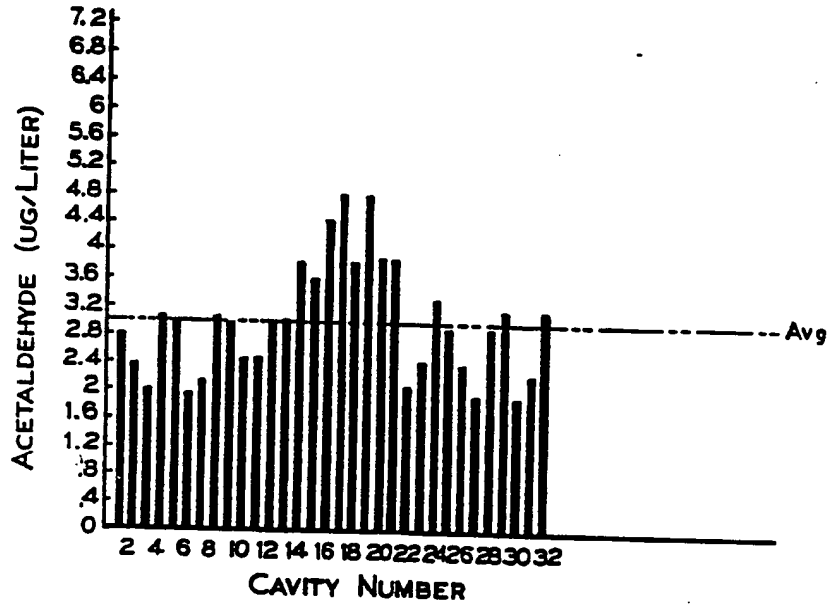


**FIG-8**

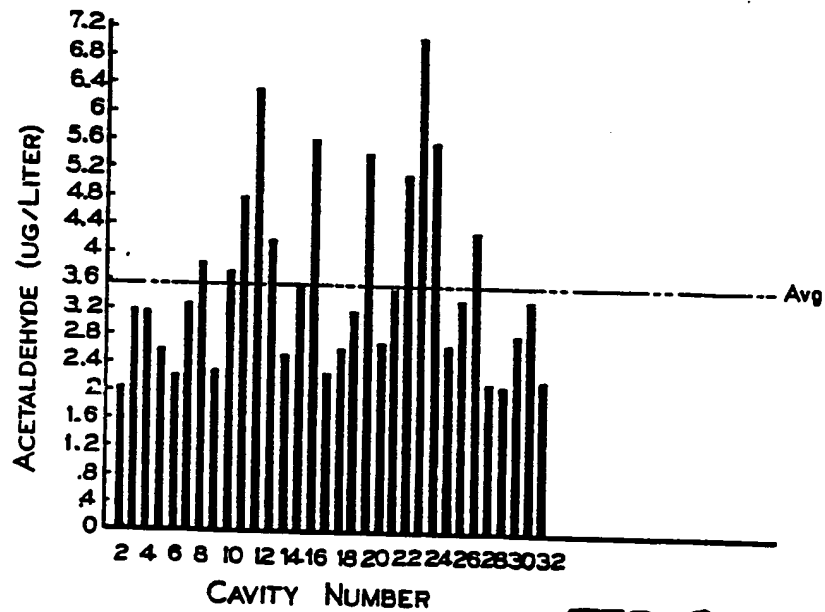

**FIG-9**



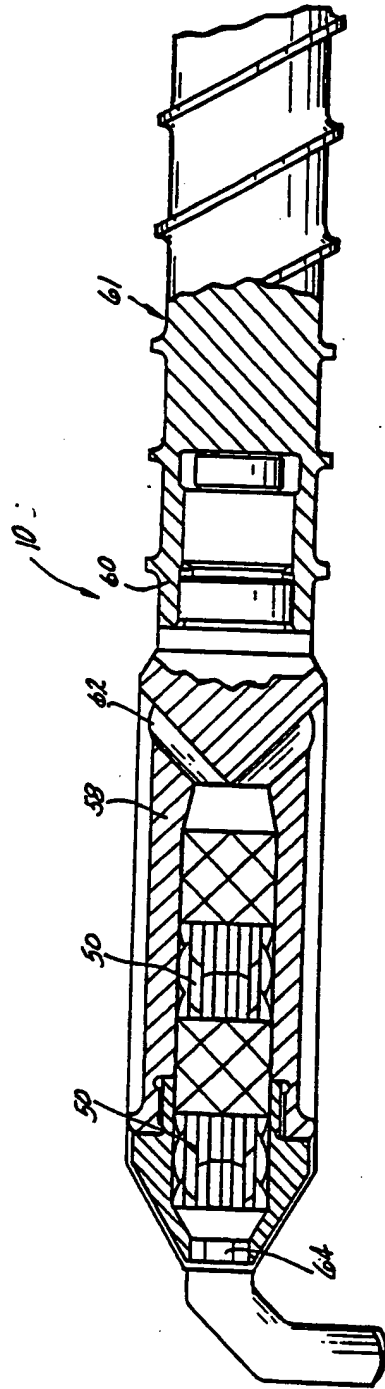

**FIG-10**